

AX50

SPECIFICATIONS



KOMATSU®



The Forklift With Proven Ability.™

PNEUMATIC TIRE FORKLIFTS

3,000 – 3,500 LBS. CAPACITY | GAS AND LPG

TRUCK DATA

GENERAL				FG15HTU-20		FG18HTU-20	
Power Type				LPG		LPG	
Operation Type				Sit-Down		Sit-Down	
Capacity @ 24 in. (600 mm) load center*		lbs. (kg)		3,000 (1,360)		3,500 (1,580)	
Load distance from center axle (2-stage)		in. (mm)		15.4 (390)		15.4 (390)	
Wheelbase		in. (mm)		55.1 (1,400)		55.1 (1,400)	
WEIGHT							
Service weight (includes 2-stage std. mast & forks)		lbs. (kg)		5,940 (2,695)		6,340 (2,875)	
Axle Loading	Loaded	Front	lbs. (kg)	7,770 (3,525)		8,470 (3,840)	
		Rear	lbs. (kg)	1,170 (530)		1,355 (615)	
	Unloaded	Front	lbs. (kg)	2,620 (1,190)		2,510 (1,140)	
		Rear	lbs. (kg)	3,320 (1,505)		3,820 (1,735)	
TIRE							
Tire type				Pneumatic		Pneumatic	
Tire size, front				6.5 - 10 - 10PR (I)		6.5 - 10 - 10PR (I)	
Tire size, rear				5 - 8 - 8PR (I)		5 - 8 - 8PR (I)	
Number of wheels, front / rear		x=driven		2x / 2		2x / 2	
Tread (center of tires)	Front	in. (mm)		35 (890)		35 (890)	
	Rear	in. (mm)		35.2 (895)		35.2 (895)	
DIMENSIONS							
Tilting angle, 2-stage (FV) masts, forward / backward		deg.		6 / 8		6 / 8	
Tilting angle, 3-stage (TFV) masts, forward / backward		deg.		6 / 5		6 / 5	
Mast height, lowered (2-stage std. mast)		in. (mm)		85.5 (2,170)		85.5 (2,170)	
Mast height, extended (2-stage std. mast)†		in. (mm)		176 (4,470)		176 (4,470)	
Maximum fork height (2-stage std. mast)**		in. (mm)		128 (3,250)		128 (3,250)	
Free lift height (2-stage std. mast)		in. (mm)		5.5 (140)		5.5 (140)	
Height overhead guard		in. (mm)		81.5 (2,070)		81.5 (2,070)	
Length, with standard forks		in. (mm)		129.7 (3,295)		131.3 (3,335)	
Length to fork face (2-stage mast)		in. (mm)		87.6 (2,225)		89.2 (2,265)	
Overall width, at drive tires (single)		in. (mm)		42.1 (1,070)		42.1 (1,070)	
Forks, thickness x width x length		in. (mm)		1.6 x 4 x 42.1 (40 x 100 x 1,070)		1.6 x 4 x 42.1 (40 x 100 x 1,070)	
Carriage width / ITA Class		in. (mm)		41 (1,040) / II		41 (1,040) / II	
Ground clearance, under mast		in. (mm)		5.5 (140)		5.5 (140)	
Ground clearance, center of wheelbase		in. (mm)		5.1 (130)		5.1 (130)	
Right angle stacking aisle (2-stage mast without load length & clearance)††		in. (mm)		92.4 (2,345)		93.7 (2,380)	
Turning radius, outside		in. (mm)		77 (1,955)		78.3 (1,990)	
PERFORMANCE							
Travel speed, forward, loaded / unloaded		mph (km/h)		11.8 (19) / 12.4 (20)		11.8 (19) / 12.4 (20)	
Lifting speed, loaded / unloaded (2-stage mast)		fpm (mm/s)		135 (685) / 138 (700)		135 (685) / 138 (700)	
Lowering speed, loaded / unloaded (2-stage mast)		fpm (mm/s)		98 (500) / 98 (500)		98 (500) / 98 (500)	
Maximum drawbar pull, loaded		lbs. (kN)		3,700 (16.6)		3,700 (16.6)	
Maximum gradability		%		39		35	
Service brake, operation / control				Foot / Hydraulic		Foot / Hydraulic	
Parking brake, operation / control				Hand / Mechanic		Hand / Mechanic	
Steering, type				FHPS		FHPS	
DRIVE							
Engine Manufacturer / Engine model				Nissan / K21		Nissan / K21	
Rated output (SAE Net)		HP (kW) @ rpm		56 (41) @ 2,700		56 (41) @ 2,700	
Maximum torque (SAE Net)		lb. – ft. (Nm) @ rpm		116 (158) @ 1,600		116 (158) @ 1,600	
No. of cylinders / displacement		cu. in. (cm3)		4 / 126 (2,065)		4 / 126 (2,065)	
Fuel tank capacity		U.S. gallons (liters)		11 (40)		11 (40)	
OTHER							
Relief pressure, maximum		psi (bar)		2,650 (181)		2,650 (181)	
Transmission				Powershift		Powershift	
Sound level, at operator ears		dB		84		84	


NOTE: Most values shown in this publication are rounded. Therefore, direct conversion between metric and English or Imperial may be slightly different from those shown. The performance of machines is affected by the condition of the truck and how it is equipped, as well as the nature and condition of the operating area. If these specifications are critical or if your needs exceed the specifications shown here, discuss the proposed application with your authorized dealer.

*Optional masts, attachments, longer load dimensions, and higher lifting heights may result in downrating of the capacity. Contact your authorized dealer.

**Other mast heights available. See MAST DATA chart for other standard mast heights. Contact your authorized dealer.

†Includes 48-inch (1,220 mm) high load backrest. Contact your authorized dealer.

††Add load distance and clearance. Contact your authorized dealer.

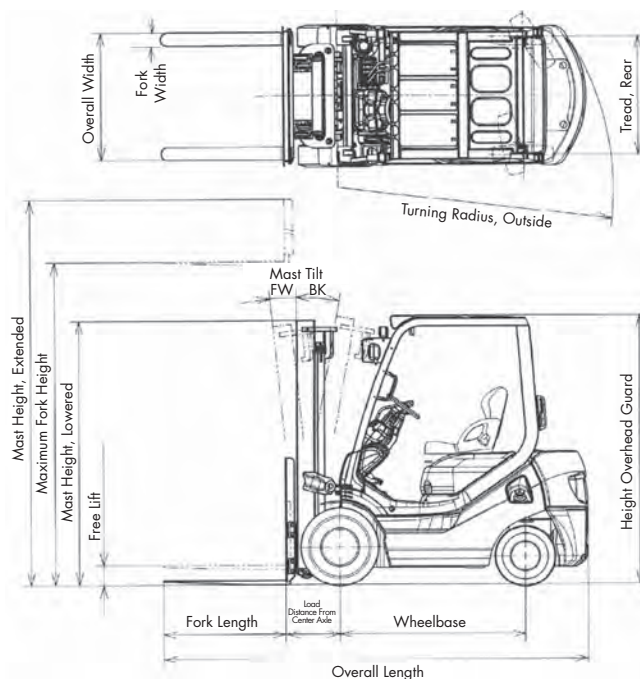

Maximum Fork Height in. (mm)	Mast Height Lowered in. (mm)	Mast Height Extended in. (mm)	Free Lift in. (mm)
EZview® FG15/18			
2-STAGE FREE VIEW (FV)			
106 (2,690)	74.5 (1,890)	154 (3,910)	5.5 (140)
114 (2,895)	78.5 (1,990)	162 (4,115)	5.5 (140)
128 (3,250)	85.5 (2,170)	176 (4,470)	5.5 (140)
146 (3,705)	94.5 (2,400)	194 (4,925)	5.5 (140)
158 (4,010)	100.5 (2,550)	206 (5,230)	5.5 (140)
3-STAGE FULL FREE VIEW (TFV)			
158.5 (4,025)	75.5 (1,915)	206.5 (5,245)	27.5 (695)
170.5 (4,330)	79.5 (2,020)	218.5 (5,550)	31.5 (800)
188.5 (4,785)	85.5 (2,170)	236.5 (6,010)	37.5 (950)
198.5 (5,040)	89.5 (2,275)	246.5 (6,260)	41.5 (1,055)
216.5 (5,500)	97.5 (2,475)	264.5 (6,720)	49.5 (1,255)

NOTE: Custom masts available.
Please consult your authorized dealer for information.



KOMATSU Proven Ability

Komatsu has the ability to eclipse the competition by taking the complicated and making it simple. We strive to provide innovative solutions using the technologies of tomorrow — today.

SPECIAL FEATURES

- » EPA compliant K21 industrial engine with high torque at low RPMs for power and fuel efficiency
- » Komfort Zone™ dual floating structure uses drive-train cushion mounts and suspension compartment mounts to isolate the operator from engine and floor vibration
- » New full floating transmission with high-capacity oil cooler for the torque converter, aluminum alloy transmission case for better heat dissipation, and highly reliable, dust-resistant, double-sealed universal joint design
- » Self-adjusting brakes with thicker drums improves heat resistance in severe duty applications
- » Improved steer axle with integral double-acting, double-ended cylinder, high-capacity king-pin needle bearings, and heavy-duty seals
- » New EZview mast with improved visibility window, combined with low profile dash display, offers the operator an unrestricted view to the fork tips and surrounding area
- » Komatsu Operator Presence System (KOPS) Plus locks out lift, lower, tilt and travel functions when the operator leaves the seat for longer than three seconds

STANDARD EQUIPMENT

- » New low profile dash display – Fuel Gauge, Water Temperature Gauge and Hour Meter
- » Indicator lights – Neutral/Return to Neutral, Low Oil Pressure, Low Battery/Alternator, Hydraulic Lock (Operator Presence), Check Engine Warning, Maintenance Error Code
- » Drawbar Pin in Counterweight
- » Electronic Ignition, Anti-Restart Ignition Switch
- » Fully Hydrostatic Power Steering
- » Long-Life Headlights (OHG Mounted)
- » LED Tail/Stop/Rear Turn Lights
- » High-Mount Air Intake
- » Horn with Actuator on Center of Steering Wheel
- » Three-Piece Overhead Guard
- » Komfort Seat and Operator Restraint System with Lap Belt
- » Three-Function Hydraulic Control Valve
- » Parking Brake with Double-Action Release
- » Tilting Steering Column
- » Large, Open Floor Space with Operator Compartment Suspended-Mount Pedals
- » Transmission Torque Converter Oil Cooler
- » Load Backrest

- » Spacious Step Area, Large Entry Handgrip and Wide-Open Floor Space allows easy entry/exit to the Komfort Zone
- » Engine Protection System
- » ITA Class II Fork Carriage
- » ITA Class II Forks
- » Critical Wiring Harness Connectors are Waterproof
- » Contoured, Easy-to-Grip, Hydraulic Control Lever Knobs
- » Overhead Guard Mounted Headlights

OPTIONAL EQUIPMENT

- » Warning Lights & Audible Travel Alarms
- » Tilt Cylinder Boots
- » Cotton-Core Radiator
- » Spinner Knob Steering Wheel
- » Dual-Fuel System
- » Optional Fork Lengths
- » Sideshifter – Hang-On or Integral
- » 4-Way Valve and Internal Hosing
- » Special Tires
- » Full Suspension Seat
- » Fire Extinguisher
- » Attachments

Contact your authorized dealer for other options.

ENGINE

- K21 (2.1 liter) LPG, 4-cylinder, in-line engines with Engine Concentrated Control Systems (ECCS) exceed EPA emissions standards. These low-RPM, high-torque industrial engines offer reduced maintenance requirements, exceptional emissions controls, fast acceleration, high performance, reliable durability and enhanced serviceability through engineering excellence.
- There are two engine fuel choices: LPG single-port (throttle body) fuel injection or a dual-fuel system with easy switching at the flip of a switch. All engines are equipped with 3-way catalytic converters and closed-loop exhaust systems.
 - All engines utilize an ECCS that continuously monitors data from the fuel pressure, accelerator throttle position, mass air-flow sensor, and heated oxygen sensor – for improved fuel economy, smooth operation, reliable starting in cold weather, and high performance throughout the operating range. An electronic throttle governor protects the engine against over-rev damage.
 - Crankshaft and camshaft position sensors provide information to the ECCS for optimum ignition and fuel injection timing. Each cylinder has an individual ignition coil for precise control and reliability.
 - An engine coolant temperature sensor and controller protects the engine against damage due to high engine temperature by automatically limiting engine speed during high-temperature operation. If the engine coolant temperature exceeds safe operation temperature, the engine will be shut down. An illuminated indicator on the instrument console indicates high-temperature operation, and gives the operator warning of engine shutdown.
 - The aluminum alloy cylinder head has large intake and exhaust valves and a semi-hemispherical combustion chamber for efficient fuel consumption.
 - The engine block is designed with five main bearings. All main and rod bearings are micro-grooved to improve lubrication and reduce wear.

FUEL SYSTEM

- LPG or Dual-Fuel systems are available. The gasoline fuel tank is integral to the truck frame.
- In-tank mounted gasoline fuel delivery pump, fuel-level sensing unit, pressure regulator and filter are standard.
 - LPG fuel system uses single-point, throttle body fuel injection. A removable 33 lb. fuel tank is available with a fold back tank-mounting bracket.

COOLING SYSTEM

- The high-capacity aluminum radiator is designed with an efficient thermal transfer fin and integral oil cooler for the transmission torque converter.
- System design allows easy access to the reservoir for checking the coolant level.
 - High-volume cooling fan uses flexible plastic blades and shroud for maximum air volume and noise abatement.

ELECTRICAL SYSTEM

- Standard instrument package and operator conveniences:
- 12-volt electrical system
 - 50A alternator with built-in IC regulator
 - Key-lock, anti-restart ignition switch
 - High-torque, low-amp starter motor with planetary gear reduction
 - Waterproof electrical connectors
 - Electric fuel gauge, water temperature gauge, LCD hour meter
 - Indicator lights for Neutral/Return to Neutral, Low Oil Pressure, Low Battery/Alternator Output, Check Engine Warning, Hydraulic Lock (Operator Presence), and ECCS Status Code
 - ECCS Service Support Tool connector for rapid system diagnostics

HYDRAULIC SYSTEM

- The Hydraulic System features an integral reservoir, direct drive gear pump and fully filtered system.
- Large hydraulic fluid reservoir integral to the truck frame reduces heat buildup in the system.
 - Load sensing valve in the hydraulic circuit reduces the flow of oil to the power steering system when steering wheel is idle.

FRAME

- An all-welded assembly with heavy-gauge steel and integral hydraulic and fuel tanks provide exceptional durability.
- Welded front cross-member and bolted drive axle increase frame rigidity.
 - Loads are transferred directly from the mast to the drive axle and onto the floor without being transmitted through the frame, reducing frame stress.
 - Wide, open step area, with non-slip surface facilitates easy operator entry and exit.

DRIVE AXLE

- A heavy-duty, cast steel drive axle housing supports the load and chassis without placing a load on the free-floating axle shafts. A flange is mounted to the truck frame to improve load distribution and reduce frame flexing.

TRANSMISSION

- Komatsu Torqflow single-speed, powershift transmission is specifically designed for industrial applications.
- Column-mounted electrical shift lever gives the operator easy directional control without removing a hand from the steering wheel.
 - Optimized stall ratio for torque converter provides high torque without sacrificing travel speed.
 - A modulating control valve absorbs initial pressure spikes during initial engagement and directional change. This improves shifting capabilities and prolongs the life of the entire drive train.
 - Transmission oil is double-filtered by a 125-micron mesh on pickup, and a 35-micron cartridge on the return line.
 - Transmission oil cooler is integral with the radiator.
 - Inching control and auxiliary brake pedal combination allows the operator precise truck positioning with positive control.

BRAKES

- Hydraulic brakes are self-energizing and self-adjusting.
- Brake fluid reservoir is located under the console cover for fast, easy inspection and maintenance.
 - High-friction brake shoes are free of asbestos.
 - Heavy-duty brake backing plate and thick brake drum provide reliable braking action and reduced heat.
 - Mechanical parking brake has two-stage latching mechanism for positive engagement.

STEER AXLE

- Fully Hydrostatic Power Steering is standard.
- Heavy-duty fabricated steer axle has double-acting, double-ended power steering cylinder and no drag links or tie rods.
 - Steering stops are machined into the steering cylinder to reduce stress impact on steering linkages.
 - Grease fittings on all linkages are accessible without lifting the truck.

MAST, CARRIAGE, LBR AND FORKS

- High-visibility EZview mast assembly has a 4-roller carriage that is available in two-, three-, and four-stage Free Lift, Free View designs.
- Sealed bearings require no maintenance.
 - Angle-mounted bearings and a shaped rail flange prevent excessive wear and friction, while maintaining correct side thrust clearance.

- ITA Class II carriages accept a variety of fork sizes and common load-handling attachments.
- 48-inch-high load backrest is standard for increased load control and operator protection.
- Single or double auxiliary hydraulic-function internal hose routing is available.

OPERATOR COMPARTMENT

- A unique Komfort Zone suspension compartment isolates the operator from the floor surface and from engine vibrations, for greater operator comfort and productivity.
- Orthopedically-designed Komfort seat has built-in lumbar support, retractable seat belt, lateral restraint system, and fore and aft adjustment.
 - Hydraulic control levers are positioned for optimum access and ease of use. International symbols on the contoured grips indicate the function.
 - Tilting steering console has small-diameter steering wheel and electronic instrumentation. Tilt is infinitely adjustable, with extended room between the engine cover and console.
 - Wide-open floorboard has suspended brake and inching pedals with ribbed rubber pads for comfort and safety. Integral accelerator mechanism has a transfer roller for smooth operation.
 - Full-width rubber floor mat provides a large, non-slip surface and reduces noise, vibration and heat in the Komfort Zone.
 - Large, open steps with a traction surface and a large handgrip provide easy entry and exit for the operator.
 - Standard headlight/turn indicator control lever is mounted on the steering column for easy use.
 - Full-width overhead guard provides excellent visibility for high stacking and meets or exceeds ITSDF requirements.

SERVICEABILITY

- The engine and transmission can be easily accessed for daily inspection without the use of any tools.
- Single-piece, all-steel engine cover and seat support is fully insulated to reduce noise and heat transfer to the Komfort Zone.
 - Engine cover has gas-filled cylinder with an automatic locking device to assist in opening and to prevent the cover from unexpectedly closing.
 - Easy-access, easy-operation engine cover latch is recessed to prevent interference when entering and exiting the operator compartment.
 - Engine cover is shaped for easy access into the engine area for maintenance and service.

COMPLIANCE, APPROVALS AND ENVIRONMENTAL CONCERNS

Designed for maximum recycling at end of life, with special attention to materials and construction. Counterweight designed for breakup during recycling process. Transmission case is recyclable aluminum.

Komatsu forklifts meet or exceed American National Standard Institute, ITSDF B56.1-Part III Safety Standards for Powered Industrial Trucks.

Classified by Underwriters Laboratories, Inc. for fire hazard only. Contact your dealer for application-specific requirements. Meets or exceeds EPA emissions standards 40 CFR.

KOM85-01

©2013 Komatsu America Corp.

Printed in USA

K01(500)KM

01/13 (EV-1)

KOMATSU®

www.KomatsuAmerica.com

www.KomatsuForkliftUSA.com



Komatsu America Corp. is an authorized licensee of Komatsu Ltd. Materials and specifications are subject to change without notice. Photos may include optional equipment. **KOMATSU** is a registered trademark of Komatsu Ltd., Japan