



Manitou AWP Range

Discover a wide range of lifting, electrical and diesel platforms, direct response to your business concerns, indoors or outdoors, whether rental activities or end user' needs.



- Dealer's network
- Maintenance contracts
- Financing
- Warranty extension
- Connected solution
- Used
- Original spare parts

Your dealer :



AWP

DIESEL & ELECTRIC PLATFORMS



Head office
B.P. 249 - 430 rue de l'Aubinière - 44158 Ancenis Cedex - France
Tél : 00 33 (0)2 40 09 10 11 - Fax : 00 33 (0)2 40 09 10 97
www.manitou.com



This publication provides a description of the configuration variants and options for Manitou products, which may differ for equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available, depending on the version. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logo as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes. MANITOU BP SA - Limited company with board of directors - Share capital: 35 547 824 euros - 857 802 500 RCS Nantes

7001101N_A_2018_AWP_Range

FULL
RANGE


Handling your world

Founded over 60 years ago by the Braud family, Manitou Group now operates worldwide. A world-leader in all-terrain material handling, the Group designs, produces, distributes and services equipment intended for construction, agriculture and industries.

The Group's product ranges include: telescopic loaders including rotary and heavyweight all-terrain telescopic forklift-trucks, semi industrial and industrial all-terrain masted forklifts, compact loaders (skid-steers) on wheels or tracks, aerial work-platforms for personnel, truck-mounted forklifts, warehousing equipment and attachments.

Thanks to its high-profile brands, Manitou, Gehl and Mustang, and its network of 1,400 dealers throughout the world, the group provides the best solutions, creating most value for its customers.

With its head office in France, the group had a revenue of €1.287 billion in 2015 in 140 countries and employs 3,214 staff who are resolutely focused on customer satisfaction.

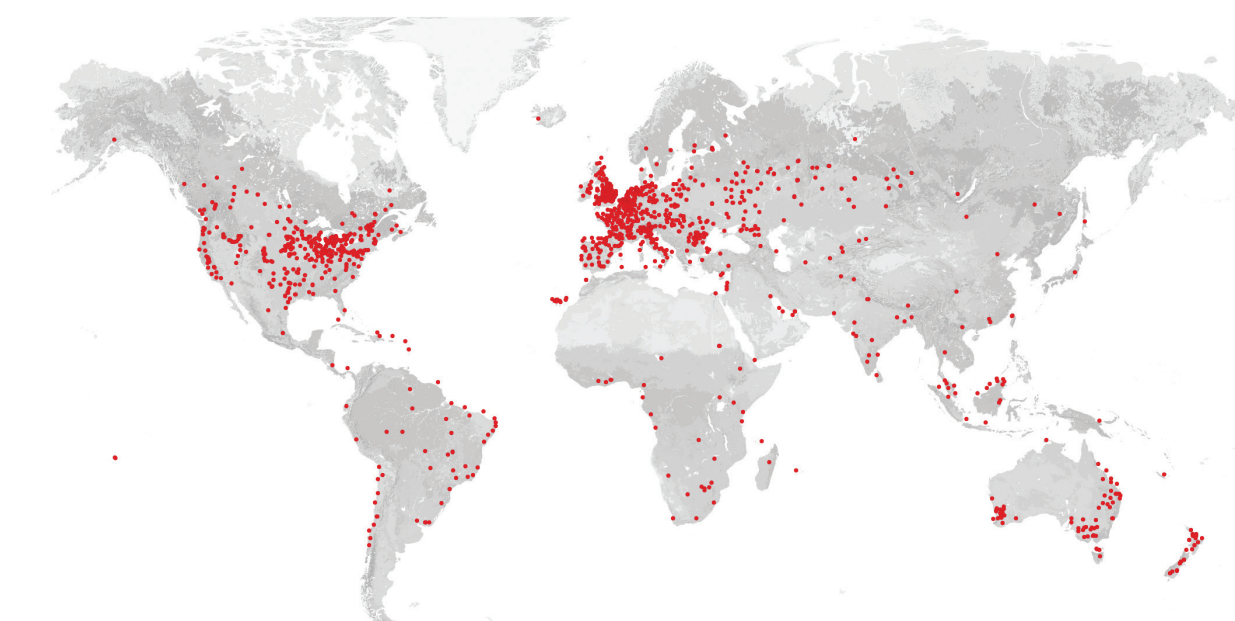

3 brands
distributed through
1,400 dealerships
in 140 countries



Diesel
Articulated



Working height (m)
Platform height (m)
Platform capacity (kg)
Outreach (m)
Overhang (m)
Dimension overall (L x w x h)
Dimension for transport (L x w x h)
Platform dimension (L x l)
Engine power (kW)
Tyres
Platform weight (kg)

160 ATJ
16,01
14,01
230
8.3
7.38
6.53 x 2.3 x 2.37
4.44 x 2.3 x 2.61
1.8 x 0.8
Kubota - 26.2
Cured-on solid 16.5"
6160

160 ATJ+
16.25
14.25
400
8.95
7
6.93 x 2.3 x 2.37
4.96 x 2.3 x 2.7
2.3 x 0.9
Kubota - 33.1
Foam filled 18"
8100

180 ATJ
18.15
16.15
230
10.62
7.42
7.64 x 2.28 x 2.46
5.59 x 2.8 x 2.7
1.8 x 0.8
Kubota - 26.2
Foam filled 18"
7550

200 ATJ
20
18
230
12
8
8.5 x 2.4 x 2.71
6.30 x 2.4 x 3.15
2.1 x 0.8
Kubota - 33.1
Foam filled 20"
10050

Diesel
Man'Go



Working height (m)
Platform height (m)
Platform capacity (kg)
Outreach (m)
Overhang (m)
Dimension overall (L x w x h)
Dimension for transport (L x w x h)
Platform dimension (L x l)
Engine power (kW)
Tyres
Platform weight (kg)

MAN'GO12
11.91
9.91
230
6.69
4.8
5.5 x 1.8 x 2.01
4.5 x 1.8 x 2.49
1.5 x 0.99
Kubota - 19.4
Cured-on solid
4100

Diesel
Telescopic



Working height (m)
Platform height (m)
Platform capacity (kg)
Outreach (m)
Overhang (m)
Dimension overall (L x w x h)
Dimension for transport (L x w x h)
Platform dimension (L x l)
Engine power (kW)
Tyres
Platform weight (kg)

260 TJ
25.91
23.91
400
19.7
0.43
10.84 x 2.43 x 2.75
8 x 2.43 x 2.75
2.3 x 0.9
Kubota - 33.6
Foam filled 20"
16300

280 TJ
27.75
25.75
350/240
21.45
0.43
11.35 x 2.43 x 2.75
8.04 x 2.43 x 2.75
2.3 x 0.9
Kubota - 33.6
Foam filled 20"
16500

Diesel
Scissor



Working height (m)
Platform height (m)
Platform capacity (kg)
Dimension overall (L x w x h)
Dimension with rails lowered (L x w x h)
Platform extension (m)
Ground clearance (m)
Travel speed (kph)
Engine power (kW)
Tyres
Platform weight (kg)

100 SC
9.9
7.9
680
3.76 x 1.75 x 2.59
3.12 x 1.75 x 1.92
1,52
0.24
5.6
Kubota - 18.5
Foam filled
3768

120 SC
11.96
9.96
454
3.76 x 1.75 x 2.59
3.12 x 1.75 x 1.92
1.52
0.24
5.6
Kubota - 18.5
Foam filled
3949

140 SC
14.2
12.2
363
3.76 x 1.75 x 2.59
3.12 x 1.75 x 2.08
1.52
0.24
5.6
Kubota - 18.5
Foam filled
5136

Electric
Articulated



Working height (m)
Platform height (m)
Platform capacity (kg)
Outreach (m)
Overhang (m)
Dimension overall (L x w x h)
Dimension for transport (L x w x h)
Platform dimension (L x l)
Engine power (Ah/V)
Tyres
Platform weight (kg)

120 AETJ-C
11.95
9.95
200
7
4.77
5.48 x 1.2 x 1.99
3.74 x 1.2 x 2.16
1.2 x 0.92
240/48
Solid non marking
6660

150 AETJ-C
15
13
200
7.6
7
6.05 x 1.5 x 1.97
4.4 x 1.5 x 2.08
1.2 x 0.922
240/48
Solid non marking
6700

170 AETJ-L
16.9
14.9
200
9.43
7.15
6.84 x 1.75 x 1.97
5.12 x 1.75 x 2.04
1.2 x 0.92
240/48
Solid non marking
6910

150 AETJ-L Bi-energy
15.4
13.4
230
7.81
7.27
6.11 x 1.9 x 2.1
4.55 x 1.9 x 2.13
1.2 x 0.92
300/48
Foam filled non marking
6435

170 AETJ-L Bi-energy
17
15
230
9.43
7.27
6.97 x 1.9 x 2.1
5.25 x 1.9 x 2.13
1.2 x 0.92
300/48
Foam filled non marking
7435

Electric
Vertical mast



Working height (m)
Platform height (m)
Platform capacity (kg)
Outreach (m)
Overhang (m)
Dimension overall (L x w x h)
Dimension for transport (L x w x h)
Platform dimension (L x l)
Engine power (Ah/V)
Tyres
Platform weight (kg)

80 VJR
7.65
5.65
200
3.24
4,235
2.95 x 0.99 x 1.99
2.95 x 0.99 x 1.99
1.11 x 0.93
250/24
Solid non marking
2250

100 VJR
9.85
7.85
200
3.15
6.67
2.8 x 0.99 x 1.99
2.8 x 0.99 x 1.99
1.11 x 0.93
250/24
Solid non marking
2650

90 V'Air
9
7
230
2.04
-
2.31 x 1.1 x 2.31
2.31 x 1.1 x 2.31
0.95 x 0.68
250/24
Solid non marking
2710

Electric
Scissor



Working height (m)
Platform height (m)
Platform capacity (kg)
Dimension overall (L x w x h)
Dimension with rails lowered (L x w x h)
Platform extension (m)
Ground clearance (m)
Travel speed (kph)
Engine power (Ah/V)
Tyres
Platform weight (kg)

78 SEC
7.79
5.79
227
1.83 x 0.81 x 2.1
1.83 x 0.81 x 1.75
0.91
0.1
4
225/4x6
Solid non marking
1503

100 SEC
9.92
7.92
227
2.26 x 0.81 x 2.26
2.26 x 0.81 x 1.91
0.91
0.1
3.5
225/4x6
Solid non marking
1959

120 SE
11.75
9.75
318
2.44 x 1.17 x 2.39
2.44 x 1.17 x 1.8
0.91
0.1
3.5
225/4x6
Solid non marking
2812